





ソダテック 400W Metal Halide Lamps スペックシート

Lamp Type: Metal Halide Lamps (American National Standard)-UPS

Control Gear: M135, M155/E or **Electronic Ballast**



Performance Data

Light Output (Lumens @ 100 hours)	30000
Lamp Lumens Per Watt	75
Rated Life (Hrs. @ 10 Hr. /Start)	12000
Correlated Colour Temperature (K)	6000K
Colour Rendering Index (CRI) or (Ra)	65
Typical Hot Restart Time (Minutes)	4-6
Burning Position	HOR±75°



Physical Data / Requirements

Base Designation	E39
Bulb Designation	ED18
Bulb Diameter (mm)	60
Max. Overall Length (mm)	248
Light Centre Length (mm)	146
Max. Base Temperature (°C)	210
Max. Bulb Temperature (°C)	430
Luminaire Type	Enclosed

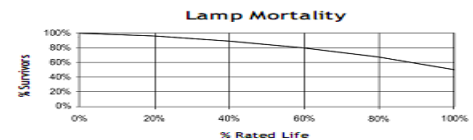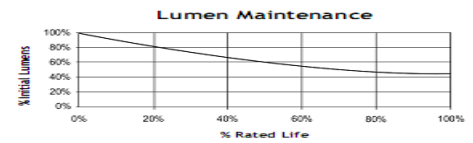

Lamp Electrical Data / Requirements

ANSI Standard	M135, M155/E
Lamp Wattage (W)	400W
Lamp Operating Voltage (V)	135V
Lamp Operating Current (Amps)	3.25A
Min. Open Circuit Voltage (RMS)	198V
Min. - Max. Starting Pulse (Peak KV)	3-4.0
Min. Pulse Width at 2700V (microseconds)	1
Min. Pulse Rate Per 1/2 cycle	1
Pulse Position (Electrical Degrees)	64° -90° , 240° -270°

