

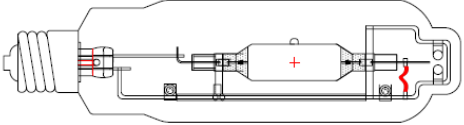


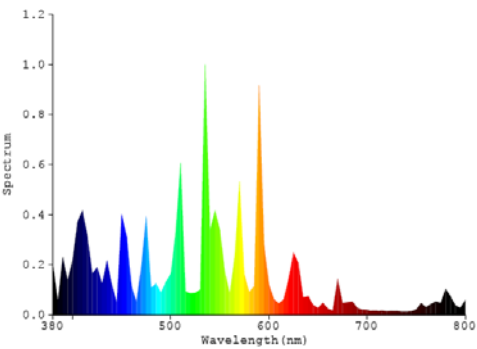

ソダテック 600W Metal Halide Lamps スペックシート

Lamp Type:	Metal Halide	
Control Gear:	S106/E COMPATIBLE or Electronic Ballast	
Performance Data		
Light Output (Lumens @ 100 hours)	48000	
Lamp Lumens Per Watt	80	
Rated Life (Hrs. @ 10 Hr. /Start)	10000	
Correlated Colour Temperature (K)	6000K	
Colour Rendering Index (CRI) or (Ra)	65	
Typical Hot Restart Time (Minutes)	5-10	
Burning Position	HOR±45°	
Physical Data / Requirements		
Base Designation	E39	
Bulb Designation	T25	
Bulb Diameter (mm)	76	
Max. Overall Length (mm)	292	
Light Centre Length (mm)	178	
Max. Base Temperature (°C)	250	
Max. Bulb Temperature (°C)	500	
Luminaire Type	Enclosed	
Lamp Electrical Data / Requirements		
ANSI Standard	S106/E	
Lamp Wattage (W)	615W	
Lamp Operating Voltage (V)	110V (86V-134V)	
Lamp Operating Current (Amps)	6.2A	
Min. Open Circuit Voltage (RMS)	198	
Min. - Max. Starting Pulse (Peak KV)	4-5	
Min. Pulse Width (US)	1.95	
Min. Pulse Rate Per 1/2 cycle	1	
Pulse Position (Electrical Degrees)	60° -90° , 240-270	